




DRIVING INNOVATION IN EV CHARGING TECHNOLOGIES

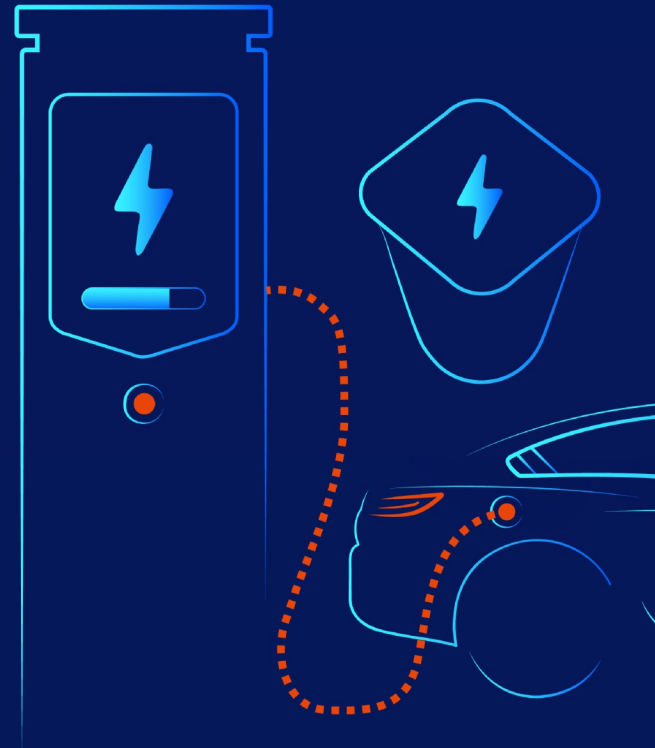

Anari Energy Co., Ltd

Sena AC Series

Portable and Flexible

Economical and Affordable

Security and Compatibility With GB/T & Type 2

Multi-range Current Adjustment

Gaia AC Series

Solar Compatible

Long Lasting Up to 10000 Times Charging

Hassle-free Experience with Easy Installation

Compatible with 99% of Evs

Tiber AC Series

Plug & Play for Home Use

RFID Swiping is Optional

Compact Size Design

User-friendly Installation Method

ARK-E 261

Safe and Worry-Free

Cost-Effective

Grid-Friendly

Intelligent Operation and Maintenance

ARK-E 418

Safe and Worry-Free

Cost-Effective

Grid-Friendly

Intelligent Operation and Maintenance

ARK-E 100C

Intelligent operation and maintenance

Extreme Safety

Efficient and Flexible

Easy Installation

Specifications >>>

Model		Sena 3.5kW	Sena 7kW
Input	Input Voltage	230VAC±10%	
	Rated Frequency	50/60Hz	
Output	Maximum Current	16A	32A
	Maximum Power	3.5kW	7kW
Note: Multiple Current level can be adjusted			
System	Charging Connector	Type 2, GB/T	
	Cable Length	5m	
	Housing Material	PC + ABS	
	Screen & Indicator	/	128*64 dots LCD
	RFID Reader	ISO 14443A / ISO 14443B	
	Authorization Mode	Plug & Charge	Plug & Charge, RFID
Protection	Ingress Protection	IP55 (Connector head IP67)	
	Protection	Over Current Protection, Residual Current Protection, Ground Protection, Surge Protection, Over/Under Voltage Protection, Over Temperature Protection, Relay Welding Detection	
	Leakage Protection	A + DC 6mA	
	Withstand Voltage	1500VAC	
	Certification Standard	IEC-62196-1, IEC-62196-2, IEC-61851-1, IEC-62752	
	Warranty	2 years	
Environment	Relative Humidity	5% ~ 85% RH	
	Working Temperature	-30°C~45°C	
	Cooling	Natural Convection	
	Operating Altitude	<2000m	
Package Dimension(W*H*D)		106mm*246mm*70mm	
Net Weight		2.4~2.8 kg	

Specifications >>>

Power Specification	Model Number	A07W1SC	A11W1SC	A22W1SC
	AC Power Input Rating	230VAC (1-Phase)	380VAC (3-phase)	380VAC (3-phase)
	Rated Frequency	50/60Hz		
	Input Current	32A	16A	32A
	Output Power	7.4kW	11kW	22kW
User Interface & Control	Connector Type	Type 2 Cable 5m or Type 2 socket (lockable)		
	Charging Control	Plug and Charge, RFID Card or APP		
	LCD Display	4.3" LCD Non-touch Screen		
	Connectivity	Wifi+ Ethernet, 4G (optional), Solar Compatible(optional)		
	OCPP Protocol	OCPP1.6, including Smart Charging		
Environmental	Storage Temperature	-40 to 65°Cambient		
	Operating Temperature	-30 to 50°Cambient		
	Operating Humidity	Up to 95% non-condensing		
	Cooling Method	Natural Cooling		
Protection	IP/IK Code	IP55 (Enclosure IP66) IK10		
	RCD	AC 30mA + DC 6mA		
	Electrical Protection	Over Load Protection, Over Current Protection, Residual Current Protection, Short Circuit Protection, Ground Protection, Surge Protection, Over/Under Voltage Protection, Over/Under Frequency Protection, Over/Under Temperature Protection O-PEN protection(optional for UK)		

Specifications >>>

Model		Tiber 7
Input	Input Voltage	230VAC±10%
	Rated Frequency	50/60Hz
Output	Maximum Current	32A
	Maximum Power	7kW
System	Charging Connector	IEC 62196 Type 2 Cable
	Cable Length	5m
	Housing Material	PC + ABS
	RFID Reader	ISO 14443A / ISO 14443B
	Authorization Mode	Plug & Charge (RFID card Option)
Protection	Ingress Protection	Ip55 (gun head Ip67)
	Protection	Over Current Protection, Residual Current Protection, Ground Protection, Surge ProtectionOver/Under Voltage Protection, Over Temperature Protection, Relay Welding Detection;
	Leakage Protection	AC + DC 6mA
	Withstand voltage	1500VAC
	Certification Standard	GB/T 20234.2 GB/T18487.1 GB/T20234.1-2023
	Warranty	3 years
Environment	Relative Humidity	5% ~ 95% RH
	Working temperature	-30°C~50°C
	Cooling	Natural Convection
	Operating Altitude	<2000m
Package Dimension(W*H*D)		166mm*240mm*124mm
Total Weight(kg)		≤2800
Net Weight		4.5 kg

Specifications >>>

SYSTEM DATA	Maximum System Efficiency	≥90%
	Charge-discharge Rate	≤0.5P
	Operating Temperature	-35°C~55°C
	Depth of Discharge	100%DOD
	Installation Position	Outdoor
	Access Method	Grid-Connected/Grid-Connected and Off-Grid
	Noise	≤70dB
	Maximum Number of Cycles	≥10000
	Altitude	≤2000m
	Charge-Discharge Switching Time	<50ms
AC TERMINAL DATA	Communication Interface	LAN
	Fire Protection System	Perfluorohexanone + Cluster-Level Water Fire Protection Interface + Active Early Warning
	System Protection Level (battery compartment)	IP55
	Operating Humidity	0%RH ~ 95%RH (No condensation)
	Thermal Management Methods	Liquid Cooling
	Communication Protocol	Modbus/IEC 104/IEC 61850/MQTT
DC TERMINAL DATA	Certification	GB/T 36276-2023, GB/T 34120-2023, GB/T 34131-2023
	AC Rated Power	131kW
	Rated Voltage Range	400V(-15%~10%)
	Maximum AC Power	251kw
	Power Factor	~1~1
	AC Current Distortion Rate	<3%
MECHANICAL PARAMETER	Rated Grid Frequency	50Hz
	Grid Type	TN 400V
	Battery Cell Type	LFP 3.2V/314Ah
	Battery Grouping Method	260S1P
	Battery Capacity	261kWh
	Battery Voltage Range	728~936V
MECHANICAL PARAMETER	Number of Temperature Detectors	155
	DC Protection	Contactors+FUSE
	Dimensions (W*H*D)	1000mm*2400mm*1350mm
	Total Weight(kg)	≤2800
Installation Method		Floor Installation

Specifications >>>

SYSTEM DATA	Maximum System Efficiency	≥90%
	Cooling Method	Liquid Cooling
	Charge-discharge Rate	≤0.5P
	Operating Temperature	-35°C~55°C
	Depth of Discharge	100%DOD
	Installation Position	Outdoor
	Access Method	Grid-connected/Grid-connected and off-grid
	Noise	≤75dB
	Maximum Number of Cycles	≥10000
	Altitude	≤2000m
AC TERMINAL DATA	Charge-Discharge Switching Time	<50ms
	Communication Interface	LAN
	Fire Protection System	Perfluorohexanone + Cluster-Level Water Fire Protection Interface + Active Early Warning
	System Protection Level (battery compartment)	IP55
	Operating Humidity	0%RH ~ 95%RH (No condensation)
	Thermal Management Methods	Liquid cooling (battery+PCS)
DC TERMINAL DATA	AC Rated Power	209kW
	Rated Voltage Range	690V(-15%~10%)
	Maximum AC Power	251kw
	PowerFactor	>0.99
	AC Current Distortion Rate	<3%
	Rated Grid Frequency	50Hz
MECHANICAL PARAMETER	Grid Type	IT 690V
	Battery Cell Type	LFP314Ah
	Battery Voltage Range	1165 ~ 1498V
	Battery PACK Configuration	52.2kWh
	Number of Temperature Detectors	248
	Battery System Configuration	418kWh
MECHANICAL PARAMETER	DC Protection	Contactors+FUSE
	Dimensions (W*H*D)	1400mm*2350mm*1300mm
	Total Weight(kg)	3800
	Installation Method	Floor Installation

Specifications >>>

SYSTEM DATA	Cell Type	LFP 3.2V/314AH
	Configuration	128S1P
	Nameplate Capacity	120kWh
	Maximum System Ecdency	≥88%
	Depth of Discharge	100% DOD
	Voltage Frequency	50Hz
	Communication Interface	LAN
	Number of Cycles	≥10000 Cycles
	System Protection Level	IP55 (battery cabinet)
	Operating Temperature	-35°C~55°C (45°C~55°C derating)
PV DATA	Operating Humidity	0%RH ~ 95%RH (No condensation)
	Noise	< 70db
	Altitude	≤2000m
	Thermal Management Methods	Liquid cooling (battery+PCS)
	Certification	IEC 62619, IEC 62477, IEC 61000 IEC 60730, VDE 4105, CEI 0-21 EN 50549-1, UN38.3
	Maximum Photovoltaic Input Power	100kWp
DC TERMINAL DATA	Rated DC Input Voltage	720V
	MPPT Voltage Range	150~850V
	Rate Voltage	720V
	Maximum Power	110kWp
GENERATOR INPUT DATA	Maximum Input/Output Power	152A
	Rated Voltage	400V (-15%~10%) 3L/N/PE
	Maximum Input Power	100kVA
	Rated Frequency	50Hz
OUTPUT DATA	Maximum Input Current	145A
	Rate Output Power	50kVA
	Maximum Output Power	55kVA/long-term; 60kVA/2min
	Rated Output Voltage	400V (-15%~10%) 3L/N/PE
MECHANICAL PARAMETER	Rated Frequency	50Hz
	Dimensions (W*H*D)	1000mm*2270mm*1000mm
Total Weight		1600Kg


We Provide Fast And Flexible OEM& ODM Service For EVSE

Castor DC Series



- Hassle-free Experience With Easy Installation
- Tailor-made Design
- 20kw & 30kw & 40kw Alternative Compatible
- Touch Screen Ensures Convenient Use

Vulco DC Series

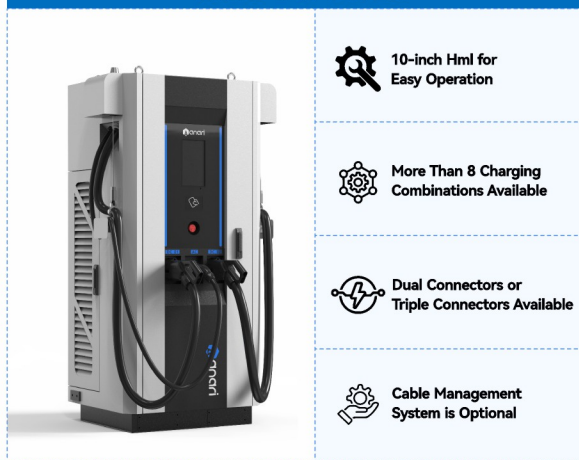

- 10-inch Hmi for Easy Operation
- More Than 8 Charging Combinations Available
- Dual Connectors or Triple Connectors Available
- Cable Management System is Optional

Aquila DC Series




DC Fast Charging Station



- Compact High Integration Design
- Charging Efficiency Up to 96%
- Flexible Power Distribution
- 21 Items of Active Safety Detection

DC Super Fast Charging Station

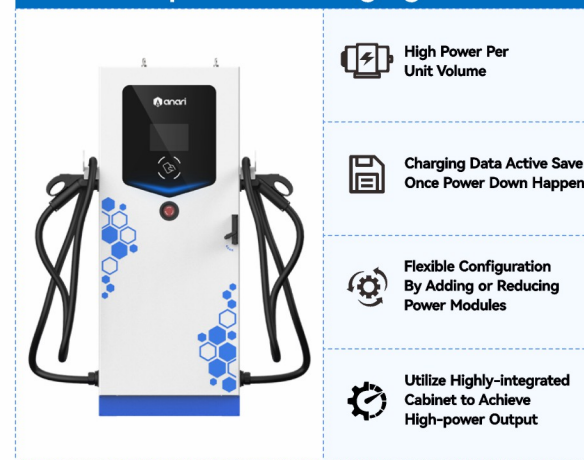

- High Power Per Unit Volume
- Charging Data Active Save Once Power Down Happens
- Flexible Configuration By Adding or Reducing Power Modules
- Utilize Highly-integrated Cabinet to Achieve High-power Output

Pales DC Series



- Compact Design
- Fast & Effective High Cost-Performance Ratio
- Smart Connectivity & Contro
- Robust Protection & Management

About Anari

Shenzhen Anari Energy Co., Ltd. (Anari for short), as a subsidiary of Boyang group, started independent operation in 2021. Anari's businesses include R&D, production and sales of EV chargers.

Our headquarters is in Shenzhen. After 4 years development, we have built offices and branches in Xi'an, Turkey and the UK. We have served over 100 customers spread in 22 countries.

Our Advantages

Independent R&D and product design Institutes

25%+ of annual sales profit put into R&D

R&D personnel proportion: **50%+**

15+ patents obtained in 2024

National high-tech enterprise

Contact us

info@anarienergy.com

www.anariev.com

[anarienergy](https://www.instagram.com/anarienergy)

Shenzhen Anari Energy Co., Ltd

Specifications >>>

DC Output	Charging Mode	CCS2 or GB/T
	Output Power	20/30/40kW
	Output Voltage	DC: 200~1000VDC
	Cable Length	5m (8m and 10m optional)
	Number of Connectors	20kW Single Connector, 30/40kW 2 Connectors
AC Input	Peak Efficiency	≥96% at Normal Output Power
	Earthing System	3P+N+PE
	Input Voltage	400VAC±10%
	Input Frequency	45~65Hz
	Power Factor	≥0.99
General characteristics	THDI	≤5%
	Stable Voltage Accuracy	±0.5%
	Stable Current Accuracy	±1%
	IP and IK Rating	IP54, IK08
	Operating Altitude	≤2000m
User Interface	Operating Temperature Range	-30°C~+70°C(Power output reduce once Temp higher than 50 °C)
	Operating Humidity Range	Relative Humidity 5%~95%
	Storage Temperature Range	-40°C~+70°C
	Mounting	Wall-mounted
	Cooling Type	Forced Air Cooling
Firmware Upgrade	Dimensions (H*W*D)	/
	Status Indication	LED / LCD / APP
	Screen Type	7-inch HD Touch Screen
	Connectivity	Ethernet
	User Authentication	APP, RFID (ISO/IEC 14443 A/B, ISO/IEC 15693, Mifare1 RFID reader), Credit Card(POS Terminal is optional)
Certification and Standards	Communication Protocol	OCPP1.6J
	Firmware Upgrade Way	OTA
	Safety and Compliance	CE/IEC61851, IEC 62196, ISO 15118-3, DIN70121, DIN70122, CHAdeMO 1.2, GB/T20234, GB/T18487, GB/T27930, NB/T33008, NB/T33002
	Certification	CE
	Protection	Over Voltage Protection, Under Voltage Protection, Overload Protection, Short Circuit Protection, Leakage Protection, Grounding Protection, Over Temperature Protection, Low Temperature Protection, Lightning Protection
Warranty	Safety Design	2 Years

Specifications >>>

DC Output	Charging Mode	CCS1 & CCS2 & GB/T & CHAdeMO Mode 4
	Output Power	60kW~360kW + AC 7kW / 22kW
	Output Voltage	DC: 200~1000VDC AC: 230VAC(7kW) / 400VAC (22kW)
	Output Current	CCS1/ 2 250A, CHAdeMO 125A, GB/T 250A
	Cable Length	5m (8m and 10m optional)
AC Input	Number Of Connectors	2 Connectors with CCS1/2 or GB/T or CHAdeMO, 3 with additional AC Type2
	Peak Efficiency	≥96% at Normal Output Power
	Earthing System	3P+N+PE
	Input Voltage	400VAC±10%
	Input Frequency	45~65Hz
General characteristics	Power Factor	≥0.99
	THDI	≤5%
	Stable Voltage Accuracy	±0.5%
	Stable Current Accuracy	±1%
	IP and IK Rating	IP54, IK08
User Interface	Operating Altitude	≤2000m
	Operating Temperature Range	-30°C~+70°C(Power output reduce once Temp higher than 55 °C)
	Operating Humidity Range	Relative Humidity 5%~95%
	Storage Temperature Range	-40°C~+70°C
	Mounting	Floor Standing
Firmware Upgrade	Cooling Type	Forced Air Cooling
	Dimensions (L*W*H)	750mm×700mm×1800mm&900mm×750mm×1800mm
	Status Indication	LED / LCD / APP
	Screen type	10-inch HD Touch Screen
	Connectivity	4G, Ethernet
Certification and Standards	User Authentication	APP, RFID (ISO/IEC 14443 A/B, ISO/IEC 15693, Mifare1 RFID reader), Credit card(POS Terminal is optional)
	Communication Protocol	OCPP1.6J
	Firmware Upgrade Way	OTA
	Safety and Compliance	CE/IEC61851, IEC 62196, ISO 15118-3, DIN70121, DIN70122, CHAdeMO 1.2, GB/T20234, GB/T18487, GB/T27930, NB/T33008, NB/T33002
	Certification	CE / TÜV
Protection	Safety Design	Over Voltage Protection, Under Voltage Protection, Overload Protection, Short Circuit Protection, Leakage Protection, Grounding Protection, Over Temperature Protection, Low Temperature Protection, Lightning Protection
Warranty	Safety Design	2 Years

Specifications >>>

DC Output	Charging Mode	CCS1 & CCS2 & GB/T & CHAdeMO Mode 4
	Output Power	60~360kW
	Output Voltage	DC: 200~1000VDC
	Output Current	CCS1/ 2 250A, CHAdeMO 125A, GB/T 250A
	Cable Length	5m (8m and 10m optional)
AC Input	Number of Connectors	2 Connectors with CCS1/2 or GB/T or CHAdeMO, 3 with additional AC Type2
	Peak Efficiency	≥96% at Normal Output Power
	Earthing System	3P+N+PE
	Input Voltage	400VAC±10%
	Input Frequency	50/60Hz
General characteristics	Power Factor	≥0.99
	THDI	≤5%
	Stable Voltage Accuracy	±0.5%
	Stable Current Accuracy	±1%
	IP and IK Rating	IP54, IK08
User Interface	Operating Altitude	≤2000m
	Operating Temperature Range	-30°C~+70°C(Power output reduce once Temp higher than 55 °C)
	Operating Humidity Range	Relative Humidity 5%~95%
	Storage Temperature Range	-40°C~+70°C
	Mounting	Floor Standing
Firmware Upgrade	Cooling Type	Forced Air Cooling
	Dimensions (H*W*D)	/
	Status Indication	LED / LCD / APP
	Screen Type	7-inch HD Touch Screen
	Connectivity	4G, Ethernet
Certification and standards	User Authentication	APP, RFID (ISO/IEC 14443 A/B, ISO/IEC 15693, Mifare1 RFID reader), Credit card(POS Terminal is optional)
	Communication Protocol	OCPP1.6J
	Firmware Upgrade Way	OTA
	Safety and Compliance	CE/IEC61851, IEC 62196, ISO 15118-3, DIN70121, DIN70122, CHAdeMO 1.2, GB/T20234, GB/T18487, GB/T27930, NB/T33008, NB/T33002
	Certification	CE
Protection	Safety Design	Over Voltage Protection, Under Voltage Protection, Overload Protection, Short Circuit Protection, Leakage Protection, Grounding Protection, Over Temperature Protection, Low Temperature Protection, Lightning Protection
Warranty	Safety Design	2 Years

Specifications >>>

Power Specification	Model Number	ANZ-D60F1DC-H ANZ-D80F1DC-H ANZ-D120F1DC-H ANZ-D160F1DC-H
	AC Power Input Rating	400 VAC +/- 15% (50 Hz or 60 Hz)
	Connector Types	3P + N + PE
	Input Current	110A 146A 220A 293A
	DC Output Voltage	150~750 Vdc
User Interface & Control	Output Power	60kW 80kW 120kW 160kW
	Outlet Current	CCS 125A, 200A; GB/T 125A, 200A, 250A; CHADEMO 125A
	Cable Length	2 * CCS2 5m/8m/10m
	Charging Control	Plug and Charge, App, RFID(ISO14443)
	LCD Display	7" LCD Touch Screen
Environmental	Connectivity	4G, Ethernet
	OCPP Protocol	OCPP1.6J
	Multilanguage	English, Turkish, French, Spanish, Russian and Chinese
	Storage Temperature	-40°C to + 60°C
	Operating Temperature	-30°C to + 55°C (Power de - rating Applies)
Protection	Operating Humidity	5 -95 % RH Non- condensing
	Cooling Method	Natural Cooling
	IP/IK Code	IP54
	Standby Power	50W*(Plug)
	Electrical Protection	Overcurrent, Overvoltage, Undervoltage, Ground Fault Including DC Leakage Protection, Integrated Surge Protection

Specifications >>>

Power Specification	Model Number	ANZ-D180F1DC-H ANZ-D240F1DC-H ANZ-D300F1DC-H ANZ-D360F1DC-H
	AC Power Input Rating	400 VAC +/- 15% (50 Hz or 60 Hz)
	Connector Types	3P + N + PE
	Input Current	254A 338A 423A 508A
	DC Output Voltage	200~1000 Vdc
User Interface & Control	Output Power	180kW 240kW 300kW 360kW
	Outlet Current	CCS 125A, 200A; GB/T 125A, 200A, 250A; CHADEMO 125A
	Cable Length	2 * CCS2 5m/8m/10m
	Charging Control	Plug and Charge, App, RFID(ISO14443)
	LCD Display	7" LCD touch screen
Environmental	Connectivity	4G, Ethernet
	OCPP Protocol	OCPP1.6J
	Multilanguage	English, Turkish, French, Spanish, Russian and Chinese
	Storage Temperature	-40°C to + 60°C
	Operating Temperature	-30°C to + 55°C (Power de - rating Applies)
Protection	Operating Humidity	5 -95 % Rh non- condensing
	Cooling Method	Natural Cooling
	IP/IK Code	IP54
	Standby Power	50W*(Plug)
	Electrical Protection	Overcurrent, Overvoltage, Undervoltage, Ground Fault Including DC Leakage Protection, Integrated Surge Protection

Specifications >>>

DC Output	Charging Mode	CCS2 & GB/T
	Output Power	60kW~240kW
	Output Voltage	DC: 200~1000VDC
	Output Current	CCS2: 250A, GB/T: 250A
	Cable Length	5m (8m and 10m Optional)
AC Input	Number of Connectors	2 Connectors(CCS2 & GB/T)
	Peak Efficiency	≥96% at Normal Output Power
	Earthing System	3P+N+PE
	Input Voltage	AC380V±20%
	Input Frequency	45~65Hz
General Characteristics	Power Factor	≥0.99
	THDI	≤5%
	Stable Voltage Accuracy	±0.5%
	Stable Current Accuracy	±1%
	IP and IK Rating	IP54, IK08
User Interface	Operating Altitude	≤2000m
	Operating Temperature Range	-30°C~+50°C (Power output reduce once Temp higher than 55 °C)
	Operating Humidity Range	5%~95%
	Storage Temperature Range	-30°C~+70°C
	Mounting	Floor Standing
Firmware Upgrade	Cooling Type	Forced Air Cooling
	Dimensions (H * W * D)	680*512*1630mm (Length * Width * Height)
	Status Indication	LED/LCD/APP
	Screen Type	7-inch HD Touch Screen
	Connectivity	4G, Ethernet
Protection	User Authentication	APP, RFID (ISO/IEC 14443 A/B, ISO/IEC 15693, Mifare1 RFID), Credit Card (optional)
	Communication Protocol	OCPP1.6J
	Firmware Upgrade Way	OTA
	Safety Design	Over Voltage Protection, Under Voltage Protection, Overload Protection, Short Circuit Protection, Leakage Protection, Grounding Protection, Over Temperature Protection, Low Temperature Protection, Lightning Protection
	Warranty	1 Years